



BettaOne *PLUS*

A one LED light solar lighting solution for **Quality, Performance & Longevity**

Also upgradable to a two or four light solution

BettaOne^{Plus}

LED light bulb:



LED power	1 x LED light bulb: 32 lux, on working level below bulb, or 1.3W energy consumption
Operating voltage	DC(6V)
Luminary efficiency	>90%
Effective beam angle	150 deg.
Colour rendering index	Ra>80
Colour temperature	4000 - 5000K
Light colour	Bright White
Operating environment	-20 deg. C ~ 55 deg. C
IP level	IP55
Expected Life span	>50000hr
Fitting type for bulb	E27
Brand	BETTA

BettaOne^{Plus}

Light bulb holder:



Light switch	Flick switch on light holder
Light socket	E27
Material	Hardened plastic
Length of cables	1 x 6m
Mount method	Hang vertical from roof
Fasteners	Included: 3 x hooks to secure light holder to hang from wood structures

BettaOne^{Plus}


Solar Charge Controller unit:



Type	Intelligent Solar Charge Controller
Operating voltage	DC(6V)
Operating environment	-20 deg. C & - 55 deg. C
IP level	IP55
Expected Life	>20,000h
Protection 1	Over charge and under discharge protection
Protection 2	Protects battery from discharge should the user forget to switch light OFF during the day
DISPLAY panel	LED type; Battery status with 3 different colours; Solar panel "CHARGE" status & Power ON and OFF status
Fuse holder	Extended holder with 4Amp fuse
Standard light ports	4 x Light ports (1 x open and 3 x plugged)
Mobile phone charger port	1 x Mobile phone charger port (blue)
Solar panel port	1 x solar panel port (red)

BettaOne^{Plus}

Solar Panel:

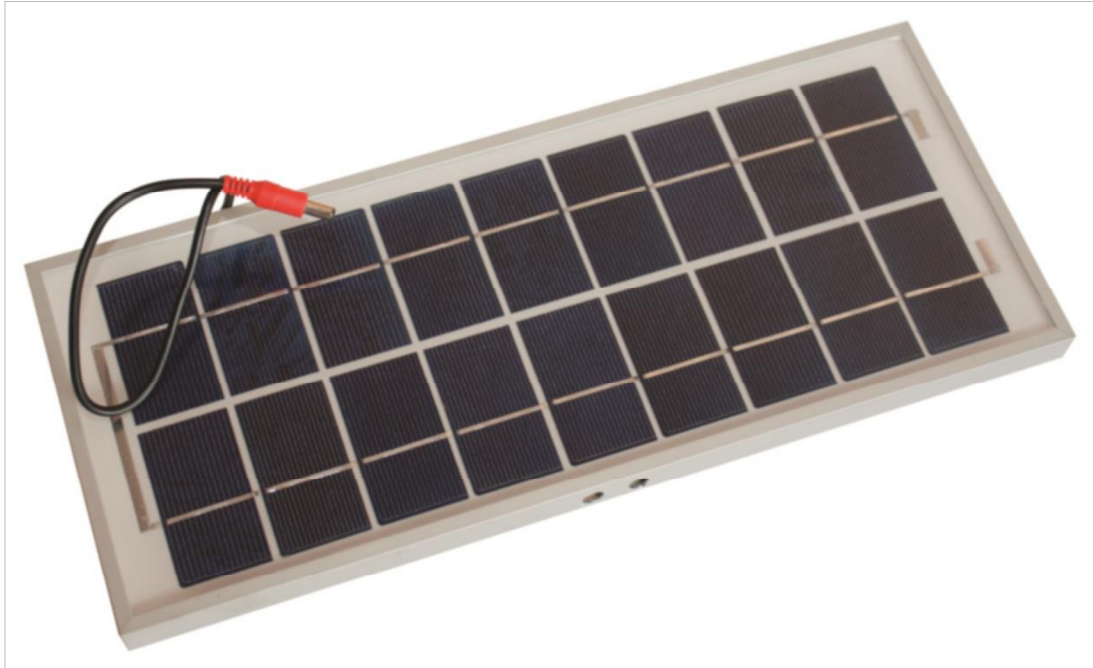

Type	Solar panel ; 3Watt
IP level	IP65
Operating environment	-40 deg. C to + 55 deg. C
Life span	20 Years
Open circuit voltage	DC(10.8V)
Short circuit current	0.3Amp
Cord length	6m
Bracket to fit solar panel	Mild steel; galvanised fastener with wing-nut to fit solar panel on roof structure

BettaOne^{Plus}

Battery:



Type	Deep cycle – lead crystal
Voltage	6V
Amp Hour	1 x 7.2Ah
Operating environment	-40 degrees C : + 65 degrees C
Life span	7 – 10 years
Discharge features	100% DOD without damaging the battery. Expected cycles at 100% DOD is 400, and 2700 at 30% DOD
Shelf life	Up to 2 years

BettaOne^{Plus}

Mobile phone charging tips:



Type	Mobile Phone charging tips
Connection Type	Via charge cable into allocated port (blue)
Identified colour port	blue
Mainstream tips	BlackBerry & USB tips for new generation mobile phones
General tips	Additional popular tips for older generation mobile phones

BettaOne^{Plus}

Fasteners:




Type	Standard fastener kit
To fit solar panel	1 x special designed panel bracket 1 x wing nut 1 x zinc roof washer
To fit power pack lights against wooden beams	2 x chipboard screws 8x30mm
To fit power pack against concrete wall	2 x nail in anchor 8x65mm
To fit cables against wooden frames	12 x Cable saddle flat 4mm
To neatly tie cables	6 x cable ties 400x5mm black

BettaOne^{Plus}

Upgradeable potential:

What is required to upgrade the BettaOne^{Plus} with another 3 additional light bulbs?

<p>1. three Betta LED 6V light bulbs can be added</p> <p>Notes: only the Betta 6V LED 1.3W light bulbs can be used</p>	
<p>2. Additional 3 x light bulb holders</p> <p>Notes: light bulb holders can also be the ceiling mountmd type with pull switch</p>	
<p>3. 2 x 6Watt solar panels</p> <p>Notes: it must be a 6V solar panel from Betta Lights only</p> <p>2 x Y-SPLITTERS with the solar panel to upgrade the system</p> <p>2 x panel brackets</p>	
<p>4. Additional 7.2Ah Lead crystal battery</p> <p>Notes: it must be a Lead Crystal battery only and only 7.2Ah</p> <p>1 x battery connecting cable</p>	

Manufacturer



SOLAR POWER LIGHTING SOLUTIONS